

Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____



ORDERING INFORMATION

Order code: 65886
 Description: TAPE/16.4'/2.9W/35K/24V/IP22/120/8MM/STD
 UPC: 69549658868
 Case quantity: 25

FEATURES AND SPECIFICATIONS

Reel Total Length: 16.4 ft. (5 m)
 Jacketed or Unjacketed: Unjacketed
 Wire gauge: 22 AWG
 Number of LEDs: 120 LEDs per meter
 37 LEDs per foot
 Cuttable length: 2 in. (50 mm) or every 6 LED chips
 Maximum run length: 33 ft.(10 m)
 Operating Temperature: -25°C / -13°F to 40°C / 104°F

PERFORMANCE DATA

Volts (V): 24 V
 Colour temperature (K): 3 500 K (Neutral white)
 Watts per length: 48 W per reel
 9.6 W per meter
 0.24 W per inch
 Light output per length: 3 350 lm per reel
 670 lm per meter
 17 lm per inch
 Efficacy (lm/W): 70 lm/W
 CRI: 90+
 Life (hrs): 50 000 hrs
 Beam angle (°): 120°

*Initial lumens range: +/- 5 %

**Typical colour temperature range: +/- 5 %




For complete dimmer and warranty information visit www.standardpro.com.
 Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 November 27, 2017

ORDERING INFORMATION

Order code: 65886
 Description: TAPE/16.4'/2.9W/35K/24V/IP22/120/8MM/STD
 UPC: 69549658868
 Case quantity: 25

TECHNICAL DRAWINGS

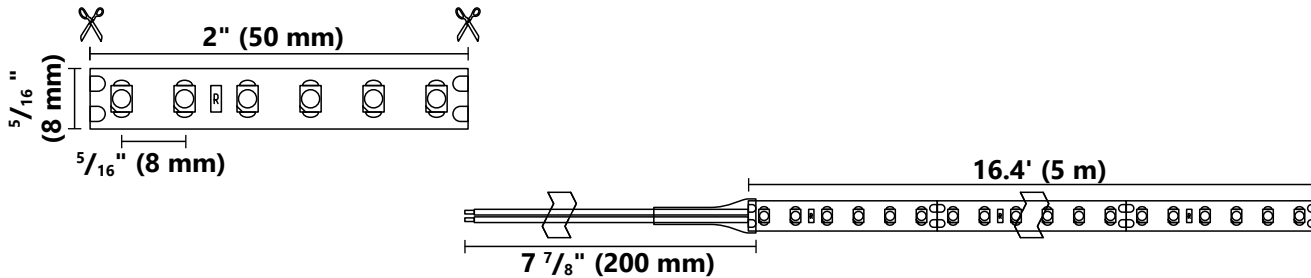

Extrusions, drivers and accessories are available (sold separately).
 Custom lengths available upon request. Ask your sales representative for more information.

CAUTIONS

- Turn off power before inspection, installation or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in dry locations.
- Do not open – no user serviceable inside.
- This device is not intended for use with emergency exit fixtures.
- Use only Class 2 rated components not exceeding 30VDC or 15 VAC when installing the outline lighting in wet locations or 60 VDC or 42.4 peak ac when installing the outline lighting in a dry or damp location.
- Do not go over 5 amps to match class 2 requirements.
- 24 VDC input only.

Qty	Description	Price

I accept the specifications of the product configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____