

BMXP341000H

processor, Modicon M340, max 512
discrete, 128 analog IO, Modbus, for severe
environments



Main

Range of Product	Modicon M340 automation platform
Product or Component Type	Processor module
Product Specific Application	For severe environments
Number of racks	2
Number of slots	11
Discrete I/O processor capacity	512 I/O single-rack configuration
Analogue I/O processor capacity	66 I/O single-rack configuration 128 I/O multi-rack configuration
Number of application specific channel	20
Monitoring	Diagnostic counters Modbus Event counters Modbus

Complementary

Control channels	Programmable loops
Integrated connection type	Non isolated serial link RJ45 character mode asynchronous in baseband, RS232C 2 twisted shielded pairs 0.3...19.2 kbit/s full duplex Non isolated serial link RJ45 character mode asynchronous in baseband, RS485 1 twisted shielded pair 0.3...19.2 kbit/s half duplex Non isolated serial link RJ45, master/slave Modbus, RTU/ASCII asynchronous in baseband, RS232C 1 twisted shielded pair 0.3...19.2 kbit/s half duplex Non isolated serial link RJ45, master/slave Modbus, RTU/ASCII asynchronous in baseband, RS485 1 twisted shielded pair 0.3...19.2 kbit/s half duplex USB port 12 Mbit/s
Communication module processor capacity	2 Ethernet communication module 2 AS-Interface module
Number of devices per segment	0...32character mode) 0...32Modbus)
Number of devices	2 point-to-point character mode 2 point-to-point Modbus
Bus length	0.00...32.81 Ft (0...10 m) serial link non isolated character mode segment 0.00...32.81 Ft (0...10 m) serial link non isolated Modbus segment 0.00...3280.84 Ft (0...1000 m) serial link isolated character mode segment 0.00...3280.84 Ft (0...1000 m) serial link isolated Modbus segment 0.00...49.21 Ft (0...15 m) character mode point-to-point 0.00...49.21 ft (0...15 m) Modbus point-to-point
Maximum tap links length	<49.21 Ft (15 m) serial link non isolated character mode segment <49.21 Ft (15 m) serial link non isolated Modbus segment <131.23 Ft (40 m) serial link isolated character mode segment <131.23 ft (40 m) serial link isolated Modbus segment
Number of addresses	0...248 character mode 0...248 Modbus
Requests	1 K data bytes per request character mode 252 data bytes per RTU request Modbus 504 data bytes per ASCII request Modbus
Control parameter	One CRC on each frame (RTU) Modbus One LRC on each frame (ASCII) character mode One LRC on each frame (ASCII) Modbus
Memory description	Internal RAM 2048 kB Internal RAM 128 kB data Internal RAM 1792 kB program constants and symbols Supplied memory card (BMXRMS008MP) backup of programs, constants, symbols and data

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Maximum size of object areas	128 kB unlocated internal data 16250 %Mi located internal bits 32464 %MWi internal words located internal data 32760 %KWi constant words located internal data
Default size of object areas	128 %KWi constant words located internal data 256 %Mi located internal bits 512 %MWi internal words located internal data
Application structure	32 event tasks 1 cyclic/periodic master task 1 periodic fast task No auxiliary task
Execution time per instruction	0.18 µs Boolean 0.26 µs double-length words 0.38 µs single-length words 1.74 µs floating points
Number of instructions per ms	4.2 Kinst/ms 65 % Boolean + 35 % fixed arithmetic 5.4 Kinst/ms 100 % Boolean
System overhead	0.2 Ms fast task 1.05 ms master task
Current consumption	72 mA 24 V DC
Supply	Internal power supply via rack
Marking	CE
Status LED	1 LED (Green) processor running (RUN) 1 LED (Red) I/O module fault (I/O) 1 LED (Red) memory card fault (CARD ERR) 1 LED (Red) processor or system fault (ERR) 1 LED (Yellow) activity on Modbus (SER COM)
Net Weight	0.44 lb(US) (0.2 kg)

Environment

Ambient Air Temperature for Operation	-13...158 °F (-25...70 °C)
Relative Humidity	10...95 % without condensation
IP Degree of Protection	IP20
Protective treatment	Conformal coating
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility 2014/34/EU - ATEX directive
Product certifications	CE[RETURN]UL[RETURN]CSA[RETURN]RCM[RETURN]EAC[RETURN]Merchant Navy[RETURN]ATEX zone 2/22[RETURN]IECEx zone 2/22
Standards	EN/IEC 61131-2 EN/IEC 61010-2-201 UL 61010-2-201 CSA C22.2 No 61010-2-201 IACS E10 EN/IEC 61000-6-5, interface type 1 and type 2 EN/IEC 61850-3, location G EN/IEC 60079-0
Environmental characteristic	Gas resistant class Gx ISA S71.04 Gas resistant class 3C4 IEC 60721-3-3 Dust resistant class 3S4 IEC 60721-3-3 Sand resistant class 3S4 IEC 60721-3-3 Salt resistant level 2 IEC 68252 Mold growth resistant class 3B2 IEC 60721-3-3 Fungal spore resistant class 3B2 IEC 60721-3-3 Hazardous location class I division 2

Ordering and shipping details

Category	18160-MODICON M340
Discount Schedule	PC34
GTIN	3595864024479
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.17 in (5.5 cm)
Package 1 Width	4.33 in (11.0 cm)
Package 1 Length	4.72 in (12.0 cm)
Package 1 Weight	8.71 oz (247.0 g)
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	8.17 lb(US) (3.705 kg)

Offer Sustainability


California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

Warranty	18 months
----------	-----------

Modules Mounted on Racks

Dimensions

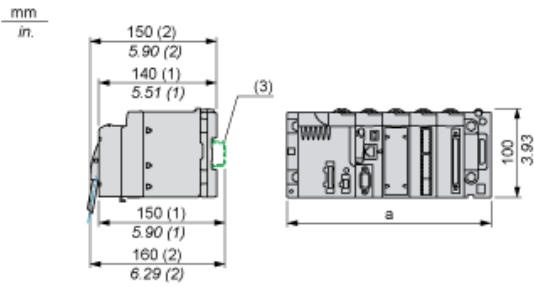

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81