



Main

Range	TeSys
Range of Product	TeSys F
Product or Component Type	Contacteur
Device short name	LC1F
Contacteur application	Resistive load Motor control
Utilisation category	AC-4 AC-1 AC-3
Poles description	3P
[Ue] rated operational voltage	<= 1000 V AC 50/60 Hz <= 460 V DC
[Uc] control circuit voltage	110 V AC 40...400 Hz
[Ie] rated operational current	1600 A (at <104 °F (40 °C)) at <= 440 V AC AC-1 780 A (at <131 °F (55 °C)) at <= 440 V AC AC-3

Complementary

[Uimp] rated impulse withstand voltage	8 kV
[Ith] conventional free air thermal current	1600 A (at 104 °F (40 °C))
Rated breaking capacity	6240 A conforming to IEC 60947-4-1
[Icw] rated short-time withstand current	3000 A 104 °F (40 °C) - 3 min 6250 A 104 °F (40 °C) - 10 s 5600 A 104 °F (40 °C) - 30 s 4600 A 104 °F (40 °C) - 1 min 2200 A 104 °F (40 °C) - 10 min
Associated fuse rating	1600 A gG at <= 440 V 800 A aM at <= 440 V
Average impedance	0.1 mOhm - Ith 1600 A 50 Hz
[Ui] rated insulation voltage	1000 V IEC 60947-4-1 1500 V VDE 0110 group C
Power dissipation per pole	250 W AC-1 60 W AC-3
Overvoltage category	III
Power pole contact composition	3 NO
Motor power kW	450 KW at 1000 V AC 50/60 Hz (AC-3) 400 KW at 380...400 V AC 50/60 Hz (AC-3) 425 KW at 415 V AC 50/60 Hz (AC-3) 425 KW at 440 V AC 50/60 Hz (AC-3) 450 KW at 500 V AC 50/60 Hz (AC-3) 475 KW at 660...690 V AC 50/60 Hz (AC-3) 220 KW at 220...230 V AC 50/60 Hz (AC-3) 110 kW at 400 V AC 50/60 Hz (AC-4)
Control circuit voltage limits	Operational 0.85...1.1 Uc 40...400 Hz 131 °F (55 °C) Drop-out 0.2...0.4 Uc 40...400 Hz 131 °F (55 °C)
Mechanical durability	5 Mcycles
Inrush power in VA	2100 VA, 40...400 Hz 0.9 68 °F (20 °C)
Hold-in power consumption in VA	50 VA, 40...400 Hz 0.9 68 °F (20 °C)
Maximum operating rate	600 cyc/h 131 °F (55 °C)
Operating time	40...80 ms closing 130...230 ms opening

Connections - terminals	Control circuit screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²)flexible without cable end Control circuit screw clamp terminals 2 0.00...0.01 in ² (1...4 mm ²)flexible without cable end Control circuit screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²)flexible with cable end Control circuit screw clamp terminals 2 0.00...0.00 in ² (1...2.5 mm ²)flexible with cable end Control circuit screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²)solid without cable end Control circuit screw clamp terminals 2 0.00...0.01 in ² (1...4 mm ²)solid without cable end Power circuit bar 2 100 x 5 mm Power circuit bolted connection
Tightening torque	Control circuit 10.62 lbf.in (1.2 N.m) Power circuit 513.34 lbf.in (58 N.m)
Mounting Support	Plate
Heat dissipation	44 W
Motor power range	250...500 KW 380...440 V 3 phase 110...220 KW 200...240 V 3 phase 250...500 kW 480...500 V 3 phase
Motor starter type	Direct on-line contactor
Contactor coil voltage	110 V AC standard 120 V AC standard
Standards	EN 60947-1 JIS C8201-4-1 IEC 60947-4-1 IEC 60947-1 EN 60947-4-1
Product Certifications	UL[RETURN]RINA[RETURN]ABS[RETURN]CB[RETURN]RMRoS[RETURN]CSA[RETURN]LROS (Lloyds register of shipping)[RETURN]DNV[RETURN]BV[RETURN]UKCA
Compatibility code	LC1F
Control circuit type	AC 40...400 Hz

Environment

IP degree of protection	IP20 front face with shrouds IEC 60529 IP20 front face with shrouds VDE 0106
Protective treatment	TH
Ambient Air Temperature for Operation	23...131 °F (-5...55 °C)
Ambient Air Temperature for Storage	-76...176 °F (-60...80 °C)
Permissible ambient air temperature around the device	-40...158 °F (-40...70 °C)
Height	17.09 in (434 mm)
Width	27.64 in (702 mm)
Depth	10.04 in (255 mm)
Operating altitude	9842.52 ft (3000 m) without derating
Net Weight	87.08 lb(US) (39.5 kg)

Ordering and shipping details

Category	22336-CTR,F-LINE,AC,OPEN,NONREV
Discount Schedule	I12
GTIN	3389110227246
Returnability	No
Country of origin	CZ

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.75 in (40.0 cm)
Package 1 Width	17.52 in (44.5 cm)
Package 1 Length	37.40 in (95.0 cm)
Package 1 Weight	125.66 lb(US) (57.0 kg)

Unit Type of Package 2	PAL
Number of Units in Package 2	2
Package 2 Height	76.77 in (195.0 cm)
Package 2 Width	47.24 in (120.0 cm)
Package 2 Length	31.50 in (80.0 cm)
Package 2 Weight	310.85 lb(US) (141.0 kg)

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions and Drawings

LC1 F780

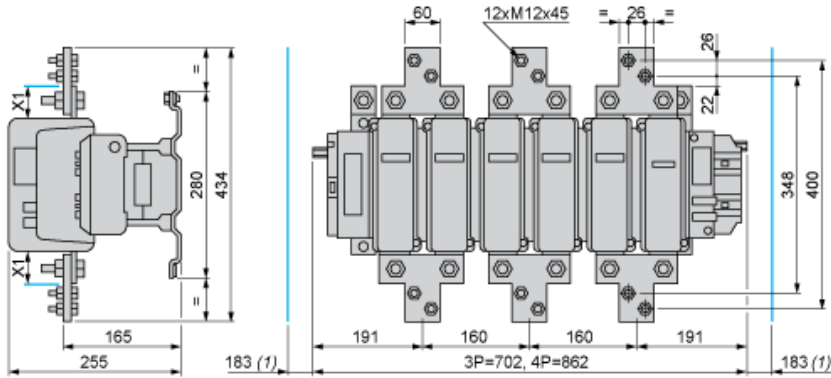


(1) Minimum distance required for coil removal.


NOTE: X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

Voltage	200...500 V	690...1000 V
X1 (mm)	30	35

Fixing centers of LC1 F780

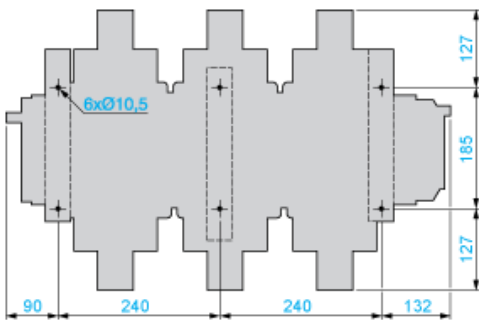

Connections and Schema



LC1 F780 ~ or ☰

