



### Main

Range	Linergy
Product name	FT
Device short name	GV2G
Product or Component Type	Comb busbar
Accessory / separate part category	Connection accessory
Poles description	3P
Range compatibility	TeSys D TeSys GV2 TeSys K TeSys U
Number of tap-offs	4
[I <sub>th</sub> ] conventional free air thermal current	63 A
Connection pitch	2.83 in (72 mm)

### Complementary

Mounting Location	On terminal
[Ui] Rated Insulation Voltage	690 V
Length	10.24 in (260 mm)
Net Weight	0.21 lb(US) (0.094 kg)

### Ordering and shipping details

Category	22367-MANUAL STR PROTECTOR - GV2
Discount Schedule	I11
GTIN	3389110555868
Returnability	No
Country of origin	RO

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.47 in (1.2 cm)
Package 1 Width	1.26 in (3.2 cm)
Package 1 Length	10.24 in (26 cm)
Package 1 Weight	3.88 oz (110 g)
Unit Type of Package 2	S01
Number of Units in Package 2	40
Package 2 Height	5.91 in (15 cm)
Package 2 Width	5.91 in (15 cm)
Package 2 Length	15.75 in (40 cm)
Package 2 Weight	9.93 lb(US) (4.502 kg)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Sets of Busbars GV2G445, GV2G454, GV2G472, with Terminal Block GV2G05

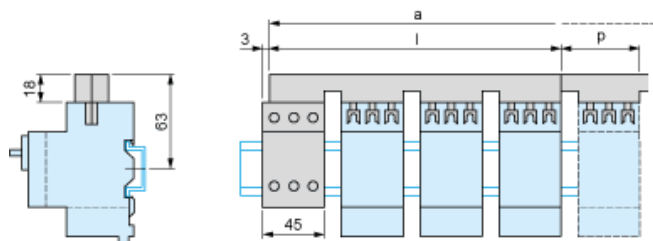

	l	p
GV2G445 (4 x 45 mm)	179	45
GV2G454 (4 x 54 mm)	206	54
GV2G472 (4 x 72 mm)	260	72

Number of tap-offs	a			
	5	6	7	8
GV2G445	224	269	314	359
GV2G454	260	314	368	422
GV2G472	332	404	476	548