

Technical Information Bulletin


CHOICE LED Lamps



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67971
 Description: A19/9W/50K/ND/CHOICE/STD 4P
 UPC: 69549679719
 Case quantity: 24 x 4 pack

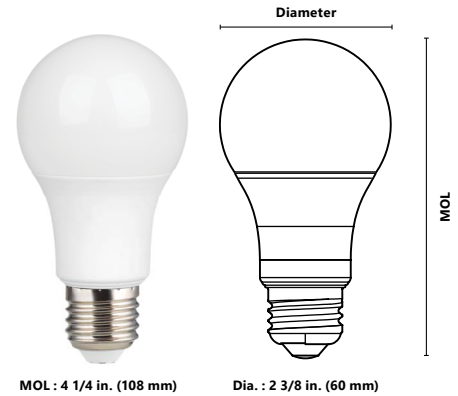

PERFORMANCE DATA

Shape: A19 4 pack
 Base: E26
 Watts(W): 9
 Volts (VAC): 120
 Colour temperature (K)**: 5 000
 Life L70 (hrs): 15 000
 Initial lumens (lm)*: 800
 Initial lumens per watt (lm/W): 89
 CRI: 80
 Beam angle: 180
 Power factor: 0.6
 Operating temperature range: -20 °C to 45 °C (-4 °F to 113 °F)

*Initial lumens range: +/- 10 % **Typical colour temperature range: +/- 5 %



This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Not suitable for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- NON-Dimmable
- Operating temperature: -20°C / -4°F to 40 °C / 104 °F.
- 2 Years Limited Warranty.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____ Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.