


BCPMSCE84S

BCPM power monitoring advanced + ethernet -
84 split core CT 50 A

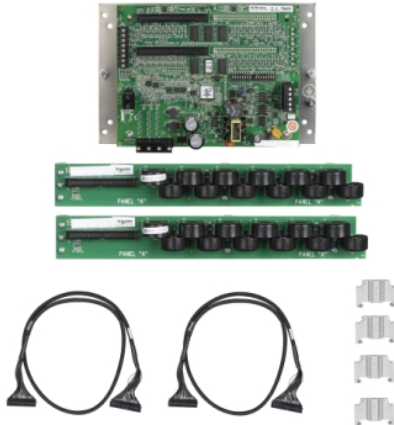

Main

Range	PowerLogic
Product name	PowerLogic BCPMSC
Product or Component Type	Multi-circuit energy meter
Device short name	BCPMSCE
Model type	Advanced + ethernet
Power monitoring	Basic instrumentation
Energy management	Sub billing and cost allocation
Device Application	Sub billing
Power quality analysis	Voltage sag and swell detection
Type of measurement	Voltage Current Frequency Active power Power factor Active energy
[Us] rated supply voltage	90...277 V AC 50/60 Hz +/- 1 %
Network Frequency	60 Hz 50 Hz

Complementary

Current transformer input	Split core CT 0.333 V/84 x
Update time	1.8 s
Measurement voltage	90...277 V phase to neutral 150...480 V phase to phase
Measurement accuracy	Branch current 2 % 0.25...2 A Branch current 1 % 2...100 A Mains current 3 % 1...100 % Mains current 3 % 2...100 % Voltage 1 % 90...277 V
Sampling rate	256 samples/cycle
Provided equipment	84 x current transformer 4 x cables 4 x adapter board
Communication port protocol	Modbus RTU BACnet IP BACnet MS/TP Modbus TCP SNMP v2
Communication port support	RS485 ETHERNET
Communication of data	Low-low current alarm Over voltage alarm Low current alarm High-high current alarm High current alarm Under voltage alarm

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environment

Mounting Mode	Fixed
Mounting Support	Chassis
Relative humidity	0...95 % 32...140 °F (0...60 °C)
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Operating altitude	9842.52 ft (3000 m)
Standards	UL 508 IEC 61036 ANSI C12.1 EN 61010
Product certifications	UL
Width	9.96 in (253 mm)
Depth	2.80 in (71 mm)
Height	12.09 in (307 mm)
Net Weight	3.31 lb(US) (1.5 kg)

Ordering and shipping details

Category	09793-PLOGIC BRANCH CIRCUIT BCPM & MCM
Discount Schedule	PL1
GTIN	3606489870089
Returnability	No
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.02 in (15.3 cm)
Package 1 Width	12.01 in (30.5 cm)
Package 1 Length	20.00 in (50.8 cm)
Package 1 Weight	27.50 lb(US) (12.474 kg)

Offer Sustainability

California proposition 65	WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant with Exemptions
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.